




Catalog No.	d ₁	d ₂ / d ₃	Colour
SM 1265-5	26	B10	RT



Kunststoff Thermoplast (Polyamid PA)
M: temperaturbeständig bis 80°C
B: temperaturbeständig bis 50°C
plastic Technopolymer (Polyamide PA)
M: temperature resistant up to 80°C
B: temperature resistant up to 50°C

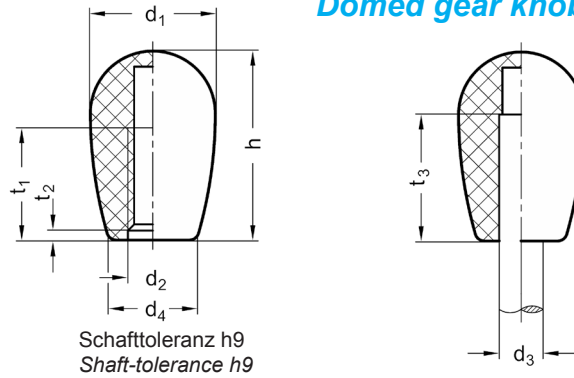

B: Schaftende soll leicht gerundet oder gefast (30°) sein

B: The shaft end should preferably be slightly rounded or phased (30°).

SW = schwarz glänzend / black shiny finish
RT = rot glänzend / red shiny finish
WS = weiß glänzend / white shiny finish
OR = orange glänzend / orange shiny finish
GR = grau glänzend / grey shiny finish
GB = gelb glänzend / yellow shiny finish
BL = blau glänzend / blue shiny finish

RAL 9005
RAL 3000
RAL 9002
RAL 2004
RAL 7035
RAL 1021
RAL 5024




mm



M: mit Gewinde
B: mit Bohrung
M: with thread
B: with bore diameter

d ₁ Ø	Form M mit Gewinde			Form B zum Aufschlagen			d ₄ Ø	h	t ₁	t ₂ ± 0,5	t ₃	kg
	d ₂ Ø		WS	d ₃ Ø		WS						
16	M06		-	B06	B06	B06	12	25	16	3,5	17	0,004
	M08		-	B08	B08	B08	14	32	20		21	0,007
26	M08		-	B08	B08	-				5,0	30 / 25	0,016
	M10		-	B10	B10	B10	17	42	30		30	0,014
34	M10		-	B10	B10	B10	21	54,5	35	8,0	40	0,038
	M12		-	B12	B12	B12						0,036

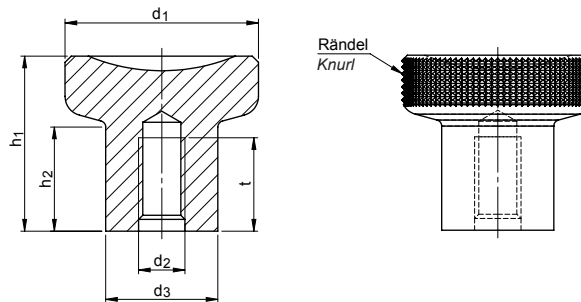

Catalog No.	Form	d ₁	d ₂	Material
SM 1265-6	B	21	M05	NI



ST: Stahl / steel
NI: Edelstahl rostfrei 1.4305
stainless steel 1.4305



ST: brüniert / blackened
NI: matt gestrahlt / matt shot-blasted



Form A: ohne Randrierung
Form B: mit Randrierung
Als Bedienteil bei Zug- oder Druckbewegungen.
Konkave Ausnehmung für Daumen. Form B
auch als Rändelmutter mit Sackloch-Gewinde.

Form A: without knurl

Form B: with knurl

Use in applications where a push or pull
movement is required. Their concave top gives
a more comfortable thumb grip. The knurled
model (Type B) can be used as an attractively
shaped knurled knob with a threaded blind hole.



mm



d ₁ Ø	d ₂ Ø	d ₃ Ø	h ₁	h ₂	t min.	kg
21	Form A / B	12,5	18,0	10,5	10	0,026
	M04					
25	M05	14,5	22,5	14,0	12	0,026
	M06					
31	M08	18,5	27,0	17,0	15	0,042
	M10					
31	M08	18,5	27,0	17,0	15	0,075
	M10					
31	M08	18,5	27,0	17,0	15	0,075
	M10					