
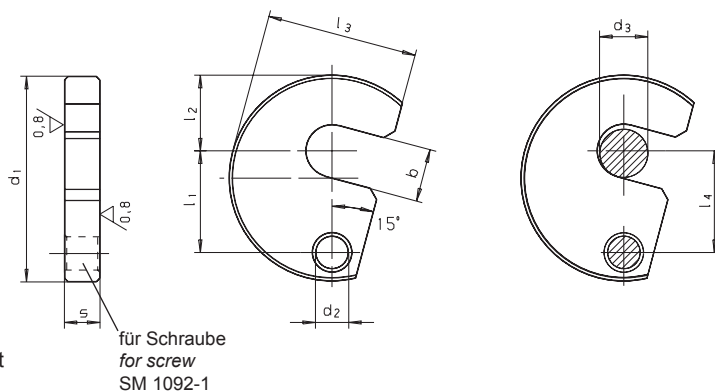


SM 1091-1 Schwenkscheibe mit Ansatzschraube DIN 923


DIN 6371 Captive C-washer



Catalog No.	d ₃
SM 1091-1	10

Schwenkscheibe: Vergütungsstahl, vergütet, brüniert
 Flachkopfschraube: Festigkeitsklasse 5.8
 captive C-washer: heat-treated steel, tempered, blackened
 countersunk screw: grade 5.8


mm



d ₃ Ø	b	d ₁ Ø	d ₂ Ø	d ₃ Ø	l ₁	l ₂	l ₃	l ₄	Schrauben screws SM 1092-1 DIN 923	kg	s -0,2
06	7,5	38	9	6	19,6	11	29,0	19	M06 x 10	0,066	9,8
08	9,5	43		8	21,6	14	32,5	21		0,081	
10	11,5	48		10	23,6	17	36,5	23		0,099	
12	13,5	61	11	12	29,6	22	45,0	29	M08 x 12	0,194	11,8
16	17,5	68		16	33,6	25	50,0	33		0,229	
20	21,5	74		20	36,6	28	55,0	36		0,265	
24	25,5	82		24	40,6	32	62,0	40	M08 x 16	0,430	15,8
30	32,0	97		30	49,0	39	73,0	48		0,584	

SM 1092-1 Ansatzschraube

DIN 923 Slotted pan head screw with shoulder



Catalog No.	d ₁	X	l ₁
SM 1092-1	M08 X	12	

Stahl 5.8, verzinkt
 steel 5.8, zinc-coated

mm

für Schwenkscheibe SM 1091-1
 for captive C-washers SM 1091-1

Reinigen mit
 SM 1306
 Clean with

Kleben mit
 SM 1300
 Lock with

d ₁ Ø	d ₂ Ø	d ₃ Ø	l ₁	l ₂	h	kg
M06	08	13	10 +0,15 / +0,07	9,0	3,1	0,009
M08	10	16	12 +0,20 / +0,10	11,0	3,8	0,017
M08	10	16	16 +0,20 / +0,10	13,5	4,6	0,036

